



Features

- Built-in accelerometers
- All inclusive design
- Compact
- Programmable start time
- High speed download
- Real-time operation
- Low cost
- Reusable
- User-friendly
- CE compliant

Applications

- Complete environmental shipment monitoring
- Shipping live cargo
- Aircraft turbulence measurement
- Endurance testing
- Assembly line monitoring
- Brake testing
- Laboratory drop testing
- Machinery monitoring
- Railcar coupling impacts

The UltraShock is a battery powered, stand alone temperature, pressure, humidity and 3-axis shock recorder. The UltraShock measures and records temperature, pressure and humidity at the selected reading rates, while shock is recorded as the peak acceleration levels over the same interval. The UltraShock is specifically designed for documenting dynamic environments such as moving vehicles, trucks, containers, ships, etc. The device is also valuable in characterizing environments such as production and assembly lines of delicate electronics, IC fabrication, communications and computer components. This compact, portable, easy to use device will measure and record up to 174,762 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and it's small size allows it to fit almost anywhere. The UltraShock makes data retrieval quick and easy. Simply plug it into an empty COM or USB port and our user-friendly software does the rest.

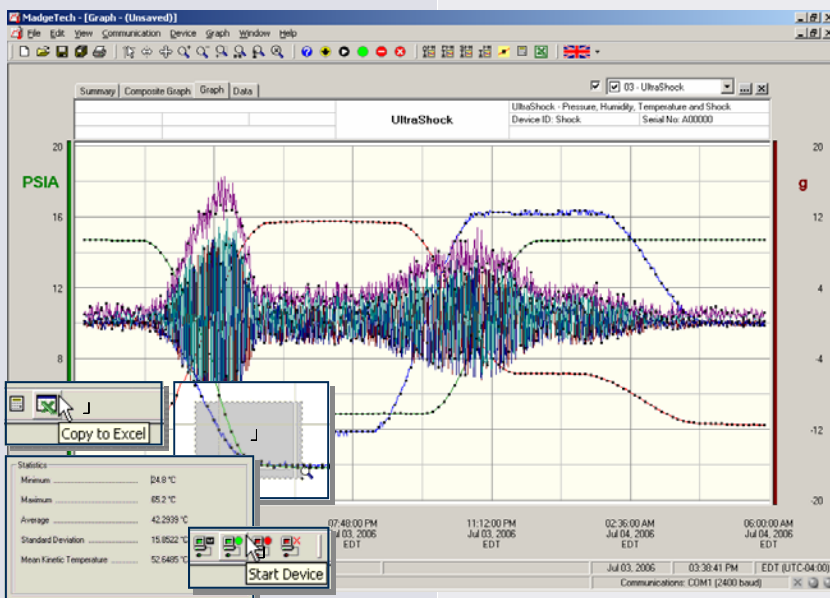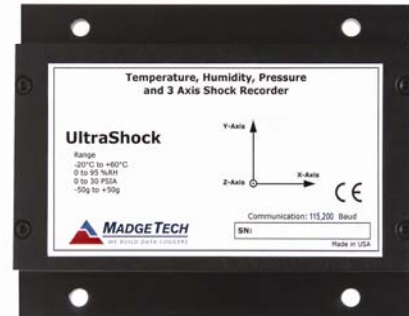

MadgeTech Data Recorder Software displays shock, temperature, humidity and pressure data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

UTLRASHOCK SPECIFICATIONS*

TEMPERATURE

Sensor: Semiconductor
Range: -20 to +60°C
Resolution: 0.1°C
Accuracy: ±0.5°C (0 to +50°C)

Memory: 174,762 readings per channel (1,572,858 readings total)

Start Modes: Immediate start or delay start, up to 6 months in advance

HUMIDITY

Sensor: Capacitive Polymer
Range: 0 to 95%RH
Resolution: 0.1%RH
Accuracy: ±3%RH (±2%RH typical at 25°C)

Real Time Recording: May be used with PC to monitor and record instantaneous measurements in real time

Password Protection: An optional password may be programmed into the device to restrict access to configuration options. Data may be read out with the password.

Specified Accuracy Range: +10 to +40°C; 10 to 80%RH

Calibration: Digital calibration through software

PRESSURE

Sensor: Semiconductor Strain Gage
Range: 0 to 30PSIA
Resolution: 0.002PSIA
Calibrated Accuracy: ±1.0%FSR at 25°C; ±0.2% typical

Calibration Date: Automatically recorded within device

Power: 9V lithium or alkaline battery included

Data Format: Date and time stamped °C, °F, K, °R ; %RH, mg/ml water vapor concentration; PSIA, inHg, mmHg, bar, atm, Torr, Pa, kPa, MPa, altitude; g

SHOCK

Accelerometer Type: MEMS Semiconductor

Time Accuracy: ±1 minute/month (at 2 to 30°C)

User Replaceable Battery: 7 days typical with lithium battery, 1 min. reading rate @ 25°C

Computer Interface: PC serial or USB (interface cable required); 115,200 baud

Software: Windows 95/98/ME/NT/2000/XP based software

Operating Environment: -20 to +60°C, 0 to 95%RH non-condensing

Dimensions: 3.5" x 4.4" x 1.0" (89mm x 111mm x 26mm)

Weight: 12 oz (341 g)

Enclosure: Anodized aluminum

Approvals: CE

BATTERY WARNING: DISCARD USED BATTERY PROMPTLY. KEEP OUT OF REACH OF CHILDREN. DO NOT DISPOSE OF IN FIRE, RECHARGE, PUT IN BACKWARDS, DISASSEMBLE, OR MIX WITH OTHER BATTERY TYPES. MAY EXPLODE, FLAME OR LEAK AND CAUSE PERSONAL INJURY.

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series

Graphical Cursor: One click displays readings by time, value, parameter or sample number

Data Table: Instantly access tabular view for detailed dates, times, values, and annotations

Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values

Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly

Statistics: Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button

Export Data: Export data in a variety of common formats, or switch to Excel® with a single click

Calibration: Automatically calculate and store calibration parameters

Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID

Communications: Automatically sets up communications port, or lets user select configuration

ORDERING INFORMATION

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

Model	Description	Price (U.S.)
ULTRASHOCK-5	Temperature, Humidity, Pressure and ±5g Tri-Axial Shock Recorder	\$799.00
ULTRASHOCK-50	Temperature, Humidity, Pressure and ±50g Tri-Axial Shock Recorder	\$799.00
ULTRASHOCK-100	Temperature, Humidity, Pressure and ±100g Tri-Axial Shock Recorder	\$799.00
IFC110	Software, manual and RS232 interface cable	\$99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
U9VL-J	Replacement battery for UltraShock	\$15.00

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration

For Quantity Discounts call 603-456-2011 or email sales@madgetech.com

